

HONG KONG BSIP TECHNOLOGY LIMITED

Email: info@bsiptech.com

Product Brochure

28th, Mar. 2024

BSiP-6200VX Conference System



Conference Central Unit BSCF-6200VX

- Supports both wired and wireless conferences simultaneously.
- 4.3-inch full-color touch screen for easy settings and monitoring.
- RS232 central control for managing priority, volume, microphone, and power.
- Audio delay under 5ms with 48K uncompressed transmission and interference avoidance.
- Built-in high-performance DSP processor for audio matrix, EQ, and volume adjustments.
- Supports independent recording and docking with voice transcription equipment.



Conference Chairman/Delegate Unit BSCF-6223VC/BSCF-6223VD


- 4-inch LCD display
- Offers a 48K sampling rate and 60Hz-18KHz bandwidth for excellent sound quality.
- 3.5mm headphone jack for MIC input/output monitoring and headset compatibility.
- Supports EQ and microphone control through PC software.



Professional Power Amplifier BSCF-350F

- 350W, High-efficiency TD-class amplifiers
- Low-noise, low-distortion circuitry ensures clean amplified output.
- Equipped with soft start, wave attenuation, amplitude limiting, and protection against over-temperature, over-voltage, and over-current.
- Offers stereo, parallel, and bridge modes, along with input sensitivity options.

Digital Audio Processor BSCF-0808VM

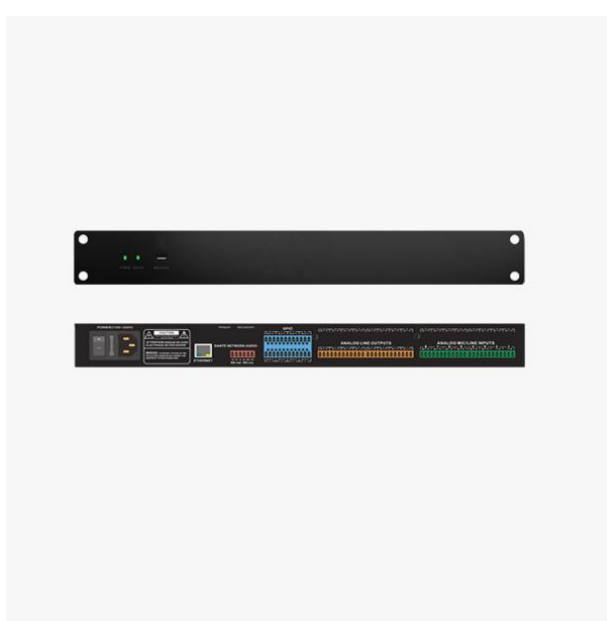

- with 40-bit DSP engine, 24-bit A/D and D/A conversion, and 48 KHz audio sampling rate
- Provides 8/16 balanced mic/line inputs and 8/16 balanced outputs with bare wire terminals.
- Built-in USB sound card
- Built-in AFC, digital matrix, auto-mixing, echo cancellation, and noise suppression.



Feedback Suppressor BSCF-3131VF

- Intelligent AGC bi-directional control
- Equipped with 24-bit A/D and D/A conversion, 24-bit DSP processor, and 96KHz high-speed sampling.
- One-key intelligent setup
- Keyboard lock function
- 2" color display for showing parameter status.



120W Professional Conference Speaker BSCF-6E

-1x25mm tweeter, 25-core voice coil, 1-inch diameter

-1x6 inch woofer, 25-core voice coil, 100 magnets

-75Hz-20KHz Frequency response

-93dB Sensitivity

-8ohm Resistance